

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
14 October 2004 (14.10.2004)

PCT

(10) International Publication Number
WO 2004/088336 A1

- (51) International Patent Classification⁷: **G01R 29/24**
- (21) International Application Number:
PCT/JP2004/004191
- (22) International Filing Date: 25 March 2004 (25.03.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
2003-092226 28 March 2003 (28.03.2003) JP
- (71) Applicant (for all designated States except US): **CANON KABUSHIKI KAISHA** [JP/JP]; 3-30-2, Shimomaruko, Ohta-ku, Tokyo 1468501 (JP).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **ICHIMURA, Yoshikatsu** [JP/JP]; c/o Canon Kabushiki Kaisha, 3-30-2, Shimomaruko, Ohta-ku, Tokyo 1468501 (JP). **SHIMADA, Yasuhiro** [JP/JP]; c/o Canon Kabushiki Kaisha, 3-30-2, Shimomaruko, Ohta-ku, Tokyo 1468501 (JP). **MIZOGUCHI, Yasushi** [JP/JP]; c/o Canon Kabushiki Kaisha, 3-30-2, Shimomaruko, Ohta-ku, Tokyo 1468501 (JP). **ZAITSU, Yoshitaka** [JP/JP]; c/o Canon Kabushiki Kaisha, 3-30-2, Shimomaruko, Ohta-ku, Tokyo 1468501 (JP).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: ELECTRIC POTENTIAL MEASURING DEVICE USING OSCILLATING DEVICE, IMAGE FORMING APPARATUS, AND ELECTRIC POTENTIAL MEASURING METHOD

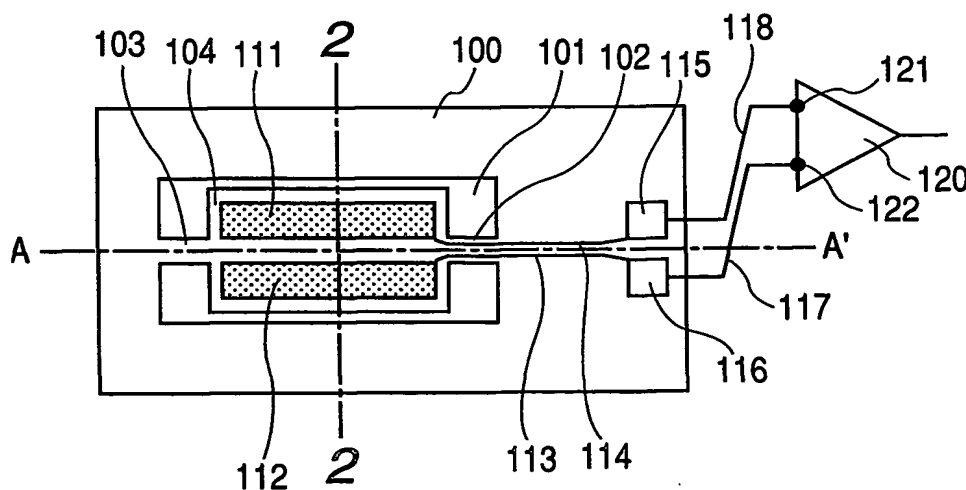

(57) Abstract: To provide an electric potential measuring device which is useful in realizing size reduction, high sensitivity, and high reliability. The electric potential measuring device includes: an oscillating device (104) which includes torsion springs (103, 102), and an oscillating body axially supported by the springs to oscillate; and signal detecting unit (111, 112) which is located on a surface of the oscillating body. A capacitance between the detection electrode and a surface of an electric potential measuring object is varied by varying a distance therebetween by the oscillating device, whereby an output signal appearing on the detection electrode is detected.

DESCRIPTION

ELECTRIC POTENTIAL MEASURING DEVICE USING
OSCILLATING DEVICE, IMAGE FORMING APPARATUS, AND
5 ELECTRIC POTENTIAL MEASURING METHOD

TECHNICAL FIELD

The present invention relates to an electric
potential measuring device using an oscillating
10 device, an image forming apparatus, and an electric
potential measuring method.

BACKGROUND ART

Conventionally, in an image forming apparatus of,
15 for example, the type which has a photosensitive drum
and forms an image by an electrophotographic process,
it is necessary to appropriately (typically,
uniformly) charge a photosensitive drum in any
environmental conditions, in order to always secure
20 stable image quality. To this end, charged potential
of the photosensitive drum is measured by using an
electric potential measuring device (electric
potential sensor), and a feedback control is carried
out by utilizing a result of the measurement so as to
25 secure uniform electric potential distribution over
the photosensitive drum.

For the conventional electric potential sensor,

a non-contact electric potential sensor is known, and especially, the electric potential sensor of the so-called mechanically modulated alternating electric field induction type is frequently used. In this type of potential sensor, electric potential on a surface of a measuring object is a function of the amplitude of current derived from a detection electrode contained in the potential sensor, and the current is mathematically expressed by the following equation:

10 $i = dQ/dt = d[CV]/dt \dots (1)$

where Q is an amount of charge appearing on the detection electrode, C is a coupling capacitance between the detection electrode and the measuring object, and V is an electric potential on a surface of the measuring object. The coupling capacitance C is given by the following equation:

$C = AS/x \dots (2)$

where A is a proportional constant, which includes the dielectric constant of material, S is an area of the detection electrode, and x is a distance between the detection electrode and the measuring object.

An electric potential V on a surface of the measuring object is measured by using the relation among those items. It is known that to exactly measure a charge amount Q appearing on the detection electrode, it is preferable to periodically modulate the magnitude of the capacitance C between the

detection electrode and the measuring object. The following methods for modulating the magnitude of the capacitance C are known.

A first modulating method is to effectively
5 modulate the area S of the detection electrode. As for a typical example of this method, a fork-shaped shutter is placed between the measuring object and the detection electrode. The degree of shutting-off of lines of electric force which reaches the
10 detection electrode from the measuring object is varied by periodically moving the shutter in a direction parallel to a surface of the measuring object. In this way, the area of the detection electrode is effectively varied to realize the
15 modulation of the capacitance C between the measuring object and the detection electrode (see U.S. Patent No. 4,720, 682).

In another example of the modulating method, a shielding member with an aperture is disposed at a
20 place facing the measuring object. A detection electrode is provided at a tip of a vibrating element shaped like a fork. The detection electrode is displaced just under the aperture in a direction parallel to the measuring object. In this way, the
25 number of lines of electric force reaching the detection electrode is modulated to thereby modulate the capacitance C (see U.S. Patent No. 3,852,667).

A second modulating method is to periodically vary a distance x between the detection electrode and the measuring object. In a typical example of this method, a detection electrode is provided at a tip of a cantilever-like vibrating element. A distance X between the measuring object and the detection electrode is periodically varied by vibrating the cantilever-like vibrating element, whereby the capacitance C is modulated (see U.S. Patent No. 4,763,078).

Further, U.S. Patent No. 5,212,451 discloses an electrostatic measurement apparatus having a single balanced beam.

More specifically, it discloses the following apparatus. That is, there is disclosed an apparatus for measuring the magnitude of an electrostatic field, comprising:

- a balanced beam vibratory element;
- means for resiliently supporting said balanced beam vibratory element;
- drive means for vibrating said balanced beam vibratory element; and an electrode, operatively associated with said balanced beam vibratory element, for sensing a capacitive coupling relationship with the electrostatic field and thereby producing a signal indicative of the magnitude of the electrostatic field during modulation of the coupling

relationship.

In the technical circumstances as stated above, recently, with the trend of reduction of the photosensitive drum diameter and increase of the density of the arrangement of related components disposed around the photosensitive drum, the size reduction and the thinning of the electric potential sensor are required. In the currently used potential sensor of the mechanically modulated alternating electric field induction type, an internal volumetric space of the sensor structure is almost occupied by the component parts of the drive mechanisms for driving the fork-shaped shutter or for vibrating the cantilever-like vibrating element, and others. Accordingly, the size reduction of those drive mechanisms is essential for reducing the size of the electric potential sensor.

The current output as an output signal from the potential sensor of the mechanically modulated alternating electric field induction type is obtained from the following equation based on the equations (1) and (2):

$$i = d[AVS/x]/dt... (3)$$

As described above, with size reduction of the electric potential sensor, the area S of the detection electrode becomes small. As a result, the sensor output current " i " also becomes small, and the

output signal from the sensor is easily influenced by external noise. The sensor is structured as an assembly of individual component parts. Thus, problem remains unsolved in terms of the size and cost
5 reduction.

DISCLOSURE OF THE INVENTION

Accordingly, with the view of overcoming the problems mentioned above, an object of the present
10 invention is to provide an electric potential measuring device, an image forming apparatus, and an electric potential measuring method, which are useful in realizing size reduction, high sensitivity and high reliability.

15 To achieve the above object, there is provided an electric potential measuring device including: an oscillating device which includes torsion springs, and an oscillating body axially supported by the torsion springs such that the oscillating body
20 oscillates about the torsion springs; and signal detecting means which is located on a surface of the oscillating body and includes at least one detection electrode, in which an output signal appearing on the detection electrode is detected by varying a distance
25 between the detection electrode and a surface of an electric potential measuring object disposed facing the detection electrode by the oscillating device to

vary a capacitance between the detection electrode and the surface of the electric potential measuring object. As understood from the related art description, to vary the capacitance between the surface of the electric potential measuring object, such as a photosensitive drum, and an electric potential sensor (detection electrode) as the electric potential measuring device, any of the following (1) to (3) is varied: (1) distance between the surface of the potential measuring object and the detection electrode, (2) dielectric constant of a material between them, and (3) facing area between them. In the present invention, the above-mentioned (1) is varied; the detection electrode is typically provided on the periodically oscillating body, and control to vary the distance between the detection electrode and the surface of the electric potential measuring object is carried out. Such electric potential measuring device allows easy designing of a configuration in which the oscillating body oscillates at a high frequency by appropriately selecting torsional rigidity of the torsion spring and a configuration of the oscillating body and others. Further, even if the oscillating body is small, it is easy to achieve a configuration in which a plurality of detection electrodes are provided on the surface of the oscillating body, and signals

outputted from the electrodes are appropriately processed (that is, design flexibility is high). With those features, even if the electric potential measuring device is small in size, an electric
5 potential on the surface of the electric potential measuring object can be measured with relatively high measuring accuracy, sensitivity, and reliability.

The invention based on the technical idea mentioned above can be implemented in various modes.

10 In one mode, two detection electrodes are disposed at positions on both sides across the central axis about which the oscillating body oscillates, on the surface of the oscillating body, and output signals containing information of
15 different phases and amplitudes appear on the detection electrodes. In another mode, the signal detecting means performs a signal detection by use of a difference between the two output signals outputted from the detection electrodes. For example, a
20 plurality of electrodes are provided on the oscillating body axially supported by means of torsion springs such that those electrodes are line symmetrical with respect to the oscillation central line of the oscillating body, and are disposed facing
25 the electric potential measuring object. In this case, distances between the detection electrodes on the oscillating body and the electric potential measuring

object are alternately varied by periodically oscillating the oscillating body, whereby charges generated on the detection electrodes are alternately varied. By so doing, an electric potential sensor
5 which produces output signals that are configured to be suitable for a differential amplifier and timed as desired and are easy to be processed can be realized.

A surface of the oscillating body may be a planar surface, a convex spherical surface, a convex
10 cylindrical surface whose generating line is parallel to the oscillation central axis, a roofshaped surface whose edge line is parallel to the oscillation central axis, or the like. Curvatures of the spherical surface and the cylindrical surface, a
15 vertical angle of the roofshaped surface and the like may be designed depending on the oscillation angle of the oscillating body, the layout and the number of detection electrodes, required device size and sensitivity, and the like.

20 According to another aspect of the present invention, there is provided an image forming apparatus including the electric potential measuring device and image forming means, in which a surface of the oscillating body of the electric potential
25 measuring device is disposed facing a surface of an electric potential measuring object of the image forming means, and the image forming means controls

an image forming process by using the signal detection result from the electric potential measuring device. The image forming means may contain a copying function, a printing function or a
5 facsimile function. The image forming means includes a photosensitive drum that rotates about a predetermined axis, and a potential on a surface of the photosensitive drum is measured by using the electric potential measuring device. Also in the
10 image forming apparatus, the advantageous features of the electric potential measuring device is efficiently utilized.

According to still another aspect of the present invention, there is provided an electric potential
15 measuring method including the steps of: placing an oscillating body having an electrode which oscillates about a shaft and an electric potential measuring object such that the electrode faces the electric potential measuring object; and measuring a surface
20 electric potential of the electric potential measuring object based on a capacitance between the electric potential measuring object and the electrode, by oscillating the oscillating body.

As described above, the output signal appearing
25 on the detection electrode is detected by varying the distance between the detection electrode disposed on the surface of the oscillating body and the surface

of the electric potential measuring object disposed facing the detection electrode by the oscillating body to vary the capacitance between the surface of the detection electrode and the surface of the electric potential measuring object. Therefore, design flexibility is relatively high, and even if the electric potential measuring device is small in size, the potential on the surface of the measuring object can be measured with relatively high measuring accuracy, sensitivity, and reliability. Specifically, the oscillating frequency, the area of the detection electrode, and the layout of the detection electrodes can flexibly be determined by appropriately selecting the rigidity of the torsion spring, the shape, length, cross sectional area and others of the oscillating body axially supported by the torsion springs. Accordingly, the sensitivity, accuracy and reliability as required upon occasion are easily realized. Further, the oscillating body can be driven at high frequency by utilization of the resonance frequency. Therefore, the device of high sensitivity is realized. Furthermore, the electrodes of the signal detecting means, the circuit and part of the drive device, and the oscillating body may be unitarily formed. As a result, the electric potential measuring device being small in size and low in cost can easily be realized.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a diagram showing a first embodiment of the present invention;

Fig. 2 is a cross sectional view showing a
5 positional relationship between an electric potential sensor and a measuring object in the first embodiment of the present invention;

Figs. 3A, 3B and 3C each are a diagram useful in explaining positional relationships between related
10 components and the measuring object when a oscillating body is oscillating in the first embodiment according to the present invention;

Fig. 4 is a diagram for explaining a mechanism for driving the electric potential sensor in the
15 first embodiment according to the present invention;

Fig. 5 is an exploded view showing another embodiment of the present invention;

Fig. 6 is a cross sectional view showing the another embodiment according to the present
20 invention;

Fig. 7 is a diagram showing a mechanism including a photosensitive drum and devices disposed therearound in an electrophotographic developing unit using an electric potential sensor constructed
25 according to the present invention; and

Fig. 8 clearly illustrates an opening 101 of a supporting substrate shown in Fig. 1.

BEST MODE FOR CARRYING OUT THE INVENTION

Hereinafter, embodiments of the present invention will be described in detail.

<First Embodiment>

5 A first embodiment of the present invention will first be described with reference to Figs. 1 (if necessary, Fig. 8 which clearly illustrates an opening 101 of a supporting substrate shown in Fig. 1.), 2, 3A to 3C, and 4.

10 Fig. 1 shows a construction of an electric potential sensor according to an embodiment of the present invention. An opening 101 is formed at a central part of a supporting substrate 100. A plate-like oscillating body 104 is supported by means of
15 two torsion springs 102 and 103 at a central part of the opening 101. The oscillating body 104 has a structure which is shaped to be line symmetrical with respect to a center line A - A' connecting the center lines of the torsion springs 102 and 103 as viewed in
20 their major axis direction.

Two plate-like detection electrodes 111 and 112 being of the same shape are located on one of the surfaces of the oscillating body 104, while being likewise disposed line-symmetrically with respect to
25 the center line A - A'. The detection electrodes 111 and 112 are respectively connected to electrode pads 115 and 116 formed on the supporting substrate 100 by

electrode wirings 113 and 114 formed on the torsion spring 102. The electrode pads 115 and 116 are respectively connected to a non-inverting input contact 122 and an inverting input contact 121 of a differential amplifier 120, which is located outside
5 the supporting substrate 100, by wirings 117 and 118.

In Fig. 2 showing a cross sectional view taken on line 2 - 2 in Fig. 1, there is illustrated the electric potential sensor shown in Fig. 1 in a state
10 that it is located to a surface 201 of a measuring object. The measuring object is, for example, a photosensitive drum. The drum is rotated about a shaft extending in a horizontal direction in the drawing or a shaft extending in a direction
15 orthogonal of a paper surface of the drawing. Where the surface 201 of the measuring object, which faces the oscillating body 104, is substantially planar, the oscillating body 104 is disposed to be substantially parallel to the surface when the
20 oscillating body is at a neutral position. In Fig. 2, reference numeral 202 designates a case used for accommodating the electric potential sensor therein. The case is made of a conductive material, and earthed. The supporting substrate 100 supporting the
25 oscillating body 104 is fastened to the case 202 by appropriate mounting means 203 and 204. Because of presence of the case 202, lines of electric force

emanating from only a portion of the surface 201,
which is directly opposite to the oscillating body
104, are allowed to reach the detection electrodes
111 and 112. As a result, the reduction of noise
5 components and the accurate potential measurement are
ensured.

The oscillating body 104 is periodically
oscillated about a central axis C of the torsion
springs 102 and 103 when an appropriate oscillating
10 body drive mechanism as will be described later is
additionally used for the electric potential sensor,
and the springs 102 and 103 are appropriately shaped
and made of an appropriate material.

Figs. 3A to 3C are each a cross sectional view
15 taken on line 2 - 2 in Fig. 1, and schematically
illustrate angular states of the oscillating body 104
when it is oscillated. Fig. 3A shows an angular state
of the oscillating body 104 when it is in a
stationary state or when it reaches, during its
20 oscillation, an angular position which is the same as
of the stationary state (In the specification, this
state of the oscillating body will be referred to as
a "neutral position"). Here, a distance between the
detection electrode 111 (112) and the measuring
25 object 201 is x_0 , and a distance from the central
axis line C of the oscillating body 104 to a central
point E of the detection electrode 111 when viewed in

the line 2 - 2 direction is L1, and a distance from the central axis line C of the oscillating body to a central point F of the detection electrode 112 when viewed in the same direction is L2.

5 Fig. 3B shows an angular state of the oscillating body 104 when it is turned and the distance between the detection electrode 111 and the measuring object 201 is the maximum. In this state, the oscillating body 104 is tilted at an angle θ_1 to
10 the left from the neutral state of Fig. 3A. In the angular state of Fig. 3B, the distance $x_{1\max}$ between the central point E of the detection electrode 111 and the measuring object 201 is given by the following equation:

15
$$x_{1\max} = x_0 + L_1 \cdot \sin (\theta_1) \dots (4)$$

Also in this state, the minimum distance $x_{2\min}$ between the central point F of the detection electrode 112 and the measuring object 201 is given by the following equation:

20
$$x_{2\min} = x_0 - L_2 \cdot \sin (\theta_1) \dots (5)$$

Fig. 3C shows an angular state of the oscillating body 104 when it is turned and the distance between the detection electrode 111 and the measuring object 201 is the minimum. In this state,
25 when the oscillating body 104 is tilted from the neutral state to the right at an angle θ_2 , the distance $x_{1\min}$ between the measuring object 201 and

the central point E of the detection electrode 111 is given by

$$x_{1\min} = x_0 - L_1 \cdot \sin(\theta_2) \dots (6)$$

In this state, the maximum distance $x_{2\max}$ between the central point F of the detection electrode 112 and the measuring object 201 is given by the following equation:

$$x_{2\max} = x_0 + L_2 \cdot \sin(\theta_2) \dots (7)$$

In this embodiment, a structure including the oscillating body 104 and the detection electrodes 111 and 112 is symmetrical with respect to the central axis line C. Therefore, the distances L_1 and L_2 , and the tilting angles θ_1 and θ_2 may be related as follows: $L_1 = L_2$ and $\theta_1 = \theta_2$. If so related, the following equations hold:

$$x_{1\max} = x_{2\max}, \text{ and } x_{1\min} = x_{2\min} \dots (8)$$

The oscillating body 104 can be oscillated sinusoidally. When it is oscillating at an angular frequency ω , a distance $x_1(t)$ between the central point E of the detection electrode 111 and the measuring object surface 201 at a time point "t" is mathematically expressed by the following equation:

$$x_1(t) = x_0 + \Delta x \cdot \sin(\omega \cdot t) \dots (9)$$

where $\Delta x = L_1 \cdot \sin(\theta_1)$.

A distance $x_2(t)$ between the central point F of the detection electrode 112 and the surface 201 of the measuring object at a time point "t" is

mathematically expressed by the following equation:

$$\begin{aligned}x_2(t) &= x_0 + \Delta x \cdot \sin(\omega \cdot t + \pi) \\ &= x_0 - \Delta x \cdot \sin(\omega \cdot t) \dots (10)\end{aligned}$$

In the above equation, π is a phase delay expressed
5 in radian, and is equal to 180° .

An electric potential measuring method by using
the electric potential sensor will be described.

As thus far described, the distances between the
central points of the detection electrodes 111 and
10 112 installed on the oscillating body 104 and the
measuring object 201 located facing the oscillating
body 104, vary periodically as understood from the
equations (9) and (10). In the embodiment, the
structure including the oscillating body 104 and the
15 detection electrodes 111 and 112 is symmetrical with
respect to the central axis line C. Accordingly, a
distance between the measuring object 201 and the
detection electrode 111 may be represented by the
distance $x_1(t)$ from the measuring object 201 to the
20 central point E. A distance from the measuring object
201 to the detection electrode 112 may likewise be
represented by the distance $x_2(t)$ from the measuring
object 201 to the central point F.

The two detection electrodes 111 and 112
25 provided on the electric potential sensor shown in
Figs. 1 and 2 produce output signals $i_1(t)$ and $i_2(t)$,
respectively. Arranging the equations (3), (9) and

(10) gives those output signals $i_1(t)$ and $i_2(t)$ as below.

$$\begin{aligned} i_1(t) &= d/dt(C_1(t) \cdot V) = d/dt[A \cdot V \cdot S/x_1(t)] \\ &= d/dt[A \cdot V \cdot S/(x_0 + \Delta x \cdot \sin(\omega \cdot t))] \dots (11) \end{aligned}$$

$$\begin{aligned} 5 \quad i_2(t) &= d/dt(C_2(t) \cdot V) = d/dt[A \cdot V \cdot S/x_2(t)] \\ &= d/dt[A \cdot V \cdot S/(x_0 + \Delta x \cdot \sin(\omega \cdot t + \pi))] \\ &= d/dt[A \cdot V \cdot S/(x_0 - \Delta x \cdot \sin(\omega \cdot t))] \\ &= i_1(t + \pi/\omega) \dots (12) \end{aligned}$$

where $C_1(t)$ is a capacitance between the detection
 10 electrode 111 and the measuring object 201, and $C_2(t)$
 is a capacitance between the detection electrode 112
 and the measuring object 201. In the above equations,
 $i_1(t)$ is an output signal current which is generated
 when charge caused by the capacitor formed between
 15 the detection electrode 111 and the measuring object
 201 varies with time. $i_2(t)$ is an output signal
 current which is generated when charge caused by the
 capacitor formed between the detection electrode 112
 and the measuring object 201 varies with time. S is
 20 an area of each of the detection electrodes 111 and
 112. V is an electric potential of the measuring
 object 201. A is a proportional constant, which is
 the same as the proportional constant A used in the
 equation (2).

25 Therefore, the capacitance C_1 between the
 measuring object 201 and the detection electrode 111
 on the oscillating body 104 and the capacitance C_2

between the measuring object 201 and the detection electrode 112 on the oscillating body 104 are sinusoidally varied when the oscillating body 104 is sinusoidally oscillated at the angular frequency ω .

5 In this way, the electric potential sensor can produce the separate signal currents $i_1(t)$ and $i_2(t)$ which respectively includes information on the surface potential V of the measuring object 201 and which are phase shifted from each other by π (180°),
10 thereby the surface electric potential V of the measuring object 201 can be detected.

A method of processing the signal currents $i_1(t)$ and $i_2(t)$ derived from the electric potential sensor will be described.

15 It is understood from the equations (11) and (12) that the signal currents $i_{1\omega}(t)$ and $i_{2\omega}(t) = i_{1\omega}(t + \pi/\omega)$ can be derived from the detection electrodes 111 and 112 by oscillating the oscillating body 104 at a frequency f ($\omega = 2 \cdot \pi \cdot f$). The charge
20 amount Q in the equation (1) is generally an extremely minute physical quantity, and the output signal current "i", which is expressed by differentiating it with respect to time, is also minute. Accordingly, the signal currents $i_{1\omega}(t)$ and
25 $i_{2\omega}(t)$ are also minute signals. Those signals are related as described above, and the signal current $i_{2\omega}(t)$ is equivalent to that obtained by shifting the

phase of $i1\omega(t)$ by $180^\circ(\pi)$ (it is $(1/2)$ period in terms of time, as given by $\pi/\omega = 1/(2f)$). A detecting circuit, called a differential amplifier, is suitable for processing such signals. Those signals $i1\omega(t)$ and
5 $i2\omega(t)$ are inputted to the differential amplifier to amplify those signals so that the magnitudes of those signals are two times as high as the original ones. Further, noise which will adversely affect those signals is removed after the signals are processed by
10 the amplifier.

A method for driving the oscillating body 104 in the electric potential sensor will now be described. Fig. 4 is a diagram useful in explaining a mechanism for oscillating the oscillating body 104 in the
15 electric potential sensor. The oscillating body 104 and the supporting substrate 100, which are housed in the case 202, are mounted to a piezoelectric element 401 by means of mounting means 203 and 204. Drive power supply electrodes 402 and 403 are formed on the
20 piezoelectric element 401, and are connected to a drive power supply 404.

When the oscillating body 104 is angularly moved as shown in Fig. 3, it is oscillated (vibrated) at a frequency, called a resonance frequency f_c ,
25 corresponding to its structure. This oscillation is called a proper vibration mode of the oscillating body 104. A drive signal whose frequency is equal to

the resonance frequency f_c is applied from the drive power supply 404 to the electrodes 402 and 403, whereby the oscillating body 104 and the supporting substrate 100, which are stored in the case 202, are
5 vibrated at the frequency f_c . The proper vibration mode of the oscillating body 104 couples with the oscillation at the frequency f_c caused by the piezoelectric element 401, and the oscillating body oscillates at the resonance frequency f_c .

10 In this way, the oscillating body 104 can be oscillated at its resonance frequency f_c by use of the drive mechanism shown in Fig. 4.

A method of manufacturing the electric potential sensor which is the first embodiment of the present
15 invention will now be described. The electric potential sensors each having the structure shown in Fig. 1 can be manufactured in a mass production by processing a silicon substrate by using the micromachining technique. To be more specific, a
20 silicon substrate can be bored to form an opening 101 passing through the substrate per se by a processing technique, such as a dry etching process. A portion of the silicon substrate left after the etching process will be used for a supporting substrate 100,
25 torsion springs 102 and 103, and a oscillating body 104.

By use of a film forming technique which is

generally used in the semiconductor manufacturing technique, an insulating film is formed over the surfaces of the supporting substrate 100, the torsion springs 102 and 103, and the oscillating body 104, and further the detection electrode 111 and 112, and the detection electrode wirings 113 and 114 can also be formed.

Thus, those parts 100, 102 to 104, and 111 to 114 can be formed on a single substrate, not through the assembling process. Further, the electric potential sensors can be manufactured in mass production by using a silicon substrate having a size large enough to allow a plurality of electric potential sensors of this embodiment to be formed thereon.

In this embodiment, the structure including the oscillating body 104 and the detection electrodes 111 and 112 is symmetrical in shape with respect to the central axis line C. Even if one or both of them is asymmetrical with respect to the central axis line, the useful effects comparable with those of this embodiment can be produced if some modification is made to the process for processing the output signals to properly process the output signals. It is evident that this technical implementation also falls within the scope of the present invention. Alternatively, the invention can be implemented by using one

detection electrode and properly detecting one output signal of it. In this case, the signal sensing ability is somewhat lower than that of the above-mentioned embodiment. In this alternative,

5 charge/discharge current based on the charge induced in the detection electrode is detected in the form of voltage by a detecting circuit. One of the methods of detecting the current is a passive measuring method which detects the current by utilizing a voltage drop
10 across a known resistor. Another method is a active measuring method, for example, a zero-potential method, which uses a potential adjusting element circuit which adjusts the charge/discharge current caused in the detection electrode so that it becomes
15 zero in level, through the adjustment of a potential of the case 202 housing the electric potential sensor shown in Fig. 2. Where the zero-potential method is used, the case 202 is not earthed, but is connected to an appropriate potential adjusting circuit.

20 Further, it is not essential that the surface of the oscillating body is planar. A surface portion of the oscillating body on which the detection electrode(s) is located may be a convex spherical surface, a roofshaped surface, a convex cylindrical
25 surface or the like, and the detection electrode is provided thereon. Accordingly, a difference between an amount of lines of electric force that the

detection electrode receives from the surface of the measuring object when the detection electrode is located near the surface of the measuring object and that when it is located apart from the object surface, is increased. In this respect, the sensitivity performance of the electric potential sensor is enhanced.

<Another Embodiment>

In the electric potential sensor having the oscillating body structure constructed according to the present invention, the method for driving the oscillating body is not limited to the above-mentioned one. Another embodiment of the invention will be described with reference to Figs. 5 and 6.

Fig. 5 is an exploded view showing an electric potential sensor which employs an oscillating body drive system, which is different from that in the first embodiment. Fig. 6 is a cross sectional view taken along a plane perpendicular to the torsional central axis line C in Fig. 5. In the embodiment, a hard magnetic film 501 is formed on the surface of the oscillating body 104 on which the detection electrodes 111 and 112 are not formed such that different magnetic poles are formed at both ends of the oscillating body 104, which are on both sides of the central axis line C of the torsion springs 102 and 103. A planar substrate 500 is disposed

substantially parallel to the surface of the supporting substrate 100 for supporting the oscillating body 104, which is opposite to the surface thereof, which faces the surface of the measuring object. An opening 502, which is substantially the same in shape as the opening 101 of the supporting substrate 100, is also formed in the substrate 500. A planar coil 503 is wound around the opening. The supporting substrate 100 is coupled to the substrate 500, while a spacer 504 is interposed therebetween.

In the electric potential sensor thus constructed, when appropriate current is fed to the planar coil 503, a magnetic field is generated in the opening 502. A couple of forces whose direction is a driving direction of the oscillating body 104 is generated by utilizing the attracting and repelling forces generated between the magnetic field and the hard magnetic film 501 formed on the oscillating body 104.

A direction of a magnetic field developed by the coil 503 is reversed when the direction of current fed to the planar coil 503 is periodically changed, and the direction of the couple of forces generated on the oscillating body 104 changes. As a result, the oscillating body 104 is oscillated. At this time, when the direction of the current fed to the planar

coil 503 is alternately changed at a frequency equal to the resonance frequency f_c of the oscillating body 104, the oscillating body 104 is oscillated in a resonant motion at the frequency f_c . The remaining
5 portion of this embodiment is the same as of the first embodiment.

Also in this embodiment, a structure including the oscillating body 104 can be manufactured from a single silicon substrate by the micromachining
10 technique as in the first embodiment. Further, a plurality of sensor elements can collectively be formed on a single silicon substrate.

The same thing is true for the formation of the substrate 500 including the coil 503, viz., a
15 plurality of elements can be manufactured on a single silicon substrate. It is readily understood that the manufacturing technique of the electric potential sensors is not limited to the micromachining technique referred to above.

20 The electric potential measuring device of the present invention can be applied to a system consisting of a plurality of devices (such as, a host computer, interface devices, an image reader, and printers) and also to a single device (such as a
25 copying machine or a facsimile machine). Fig. 7 is a model diagram showing a mechanism including a photosensitive drum and devices disposed therearound

in an electrophotographic developing unit using an electric potential sensor constructed according to the present invention.

As shown, a charger 702, an electric potential
5 sensor 701, an exposure device 705, and a toner
supplying device 706 are disposed around a
photosensitive drum 708. The charger 702 charges a
surface of the photosensitive drum 708, and the
exposure device 705 irradiates, for exposure, a
10 surface of the photosensitive drum 708 with light to
thereby form a latent image thereon. The toner
supplying device 706 supplies toner onto the latent
image to form a toner image. Further, the toner image
is transferred onto a transferred material 709 to
15 which a toner image is transferred, which is
sandwiched between a roller 707 and the
photosensitive drum 708, and the toner image
transferred from the transferring material is fixed
on the transferred material. Through those steps, an
20 image is formed.

In this case, a charging state of the
photosensitive drum 708 is measured by the electric
potential sensor 701, signals are processed by a
signal processor 703, and the charger 702 is
25 controlled through a high voltage generator 704 in a
feedback manner. As a result, a stable drum charging
and a stable image formation are realized.

CLAIMS

1. An electric potential measuring device,
comprising:

5 an oscillating device which includes torsion
springs, and an oscillating body axially supported by
the torsion springs such that the oscillating body
oscillates about the torsion springs; and

10 signal detecting means which is located on a
surface of the oscillating body and includes at least
one detection electrode,

15 wherein an output signal appearing on the
detection electrode is detected by varying a distance
between the detection electrode and a surface of an
electric potential measuring object disposed facing
the detection electrode by the oscillating device to
vary a capacitance between the detection electrode
and the surface of the electric potential measuring
object.

20 2. The electric potential measuring device
according to claim 1, wherein two detection
electrodes are disposed at positions on both sides
across a central axis about which the oscillating
body oscillates, on the surface of the oscillating
25 body, in order that output signals containing
information of different phases and amplitudes appear
on the detection electrodes.

3. The electric potential measuring device according to claim 2, wherein the signal detecting means performs a signal detection by use of a difference between the two output signals outputted
5 from the detection electrodes.

4. The electric potential measuring device according to claim 1, wherein a surface of the oscillating body is one of a planar surface, a convex spherical surface, a convex cylindrical surface whose
10 generating line is parallel to the oscillation central axis, and a roofshaped surface whose edge line is parallel to the oscillation central axis.

5. An image forming apparatus, comprising:
the electric potential measuring device
15 according to claim 1; and
image forming means,
wherein a surface of the oscillating body of the electric potential measuring device is disposed facing a surface of an electric potential measuring
20 object of the image forming means, and

wherein the image forming means controls an image forming process by using the signal detection result from the electric potential measuring device.

6. An electric potential measuring method,
25 comprising the steps of:
placing an oscillating body having an electrode which oscillates about a shaft and an electric

potential measuring object such that the electrode
faces the electric potential measuring object; and
measuring a surface electric potential of the
electric potential measuring object based on a
5 capacitance between the electric potential measuring
object and the electrode, by oscillating the
oscillating body.

FIG. 1


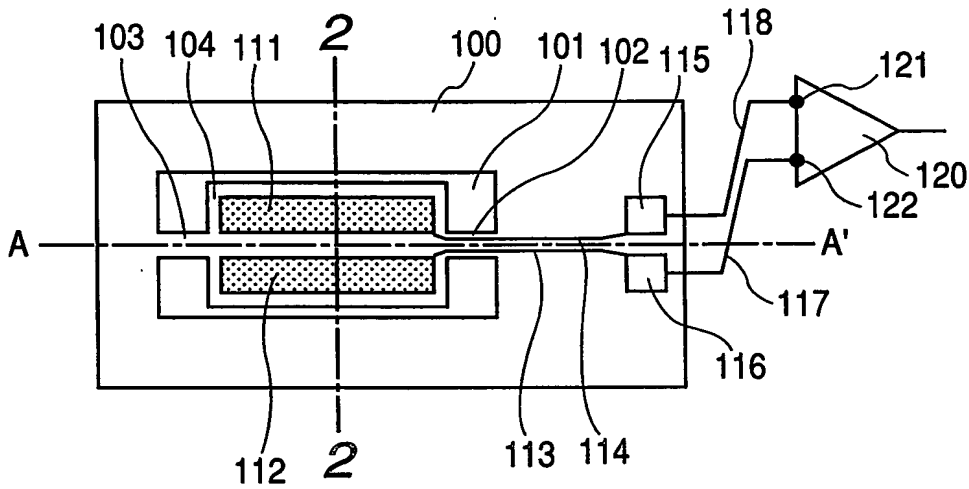


FIG. 2

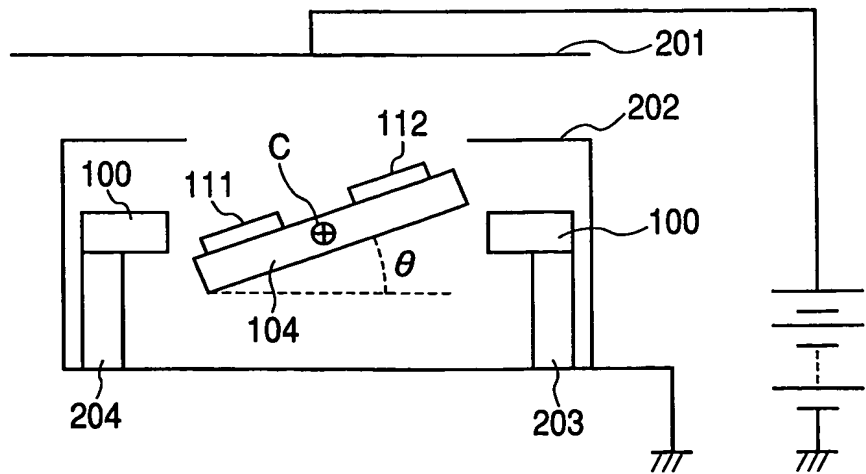

2 / 5

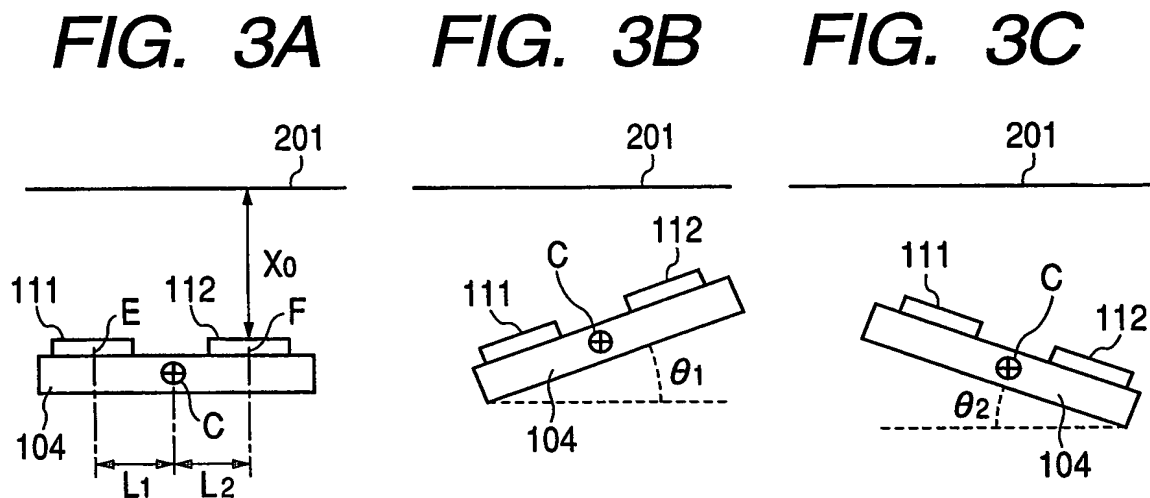
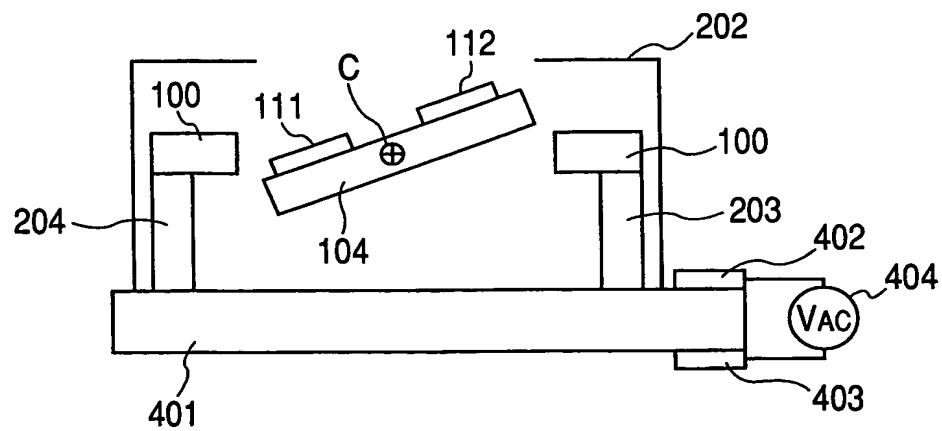
**FIG. 4**

FIG. 5

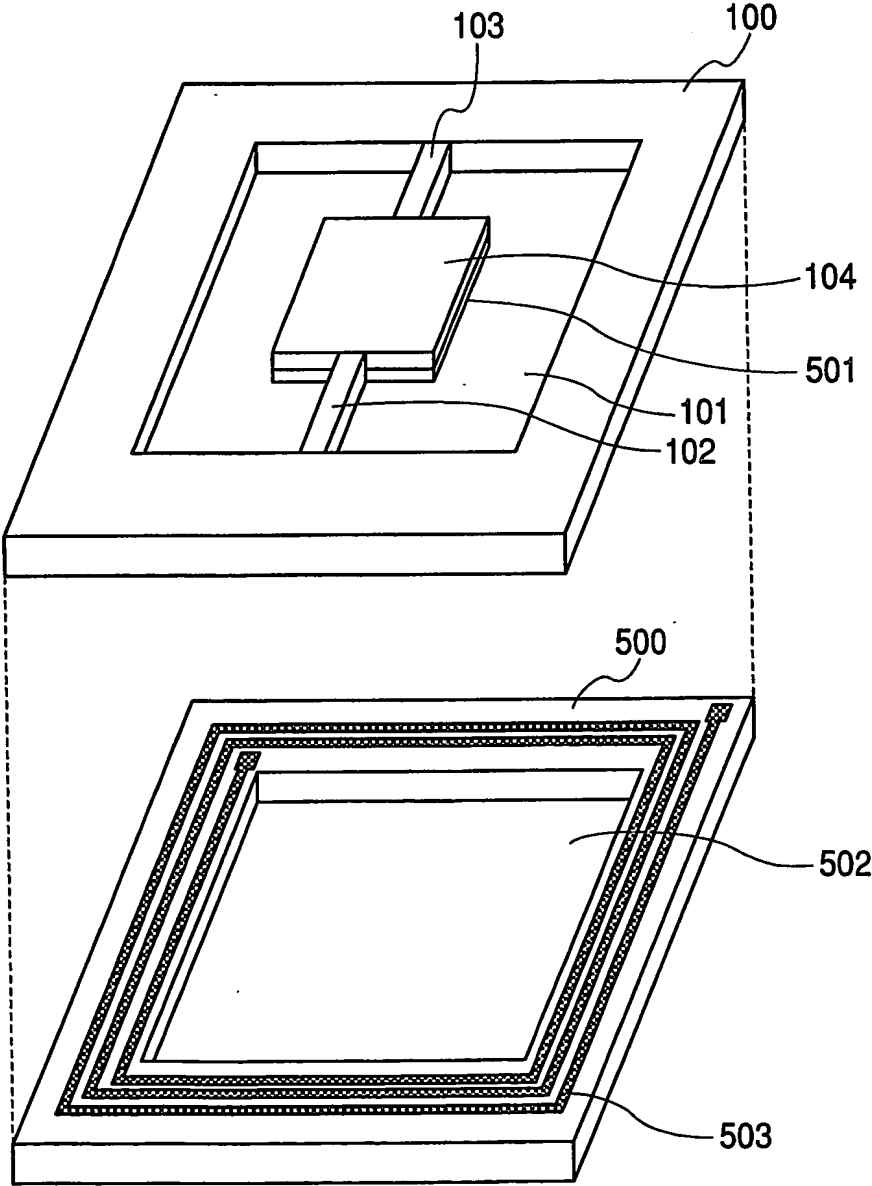


FIG. 6



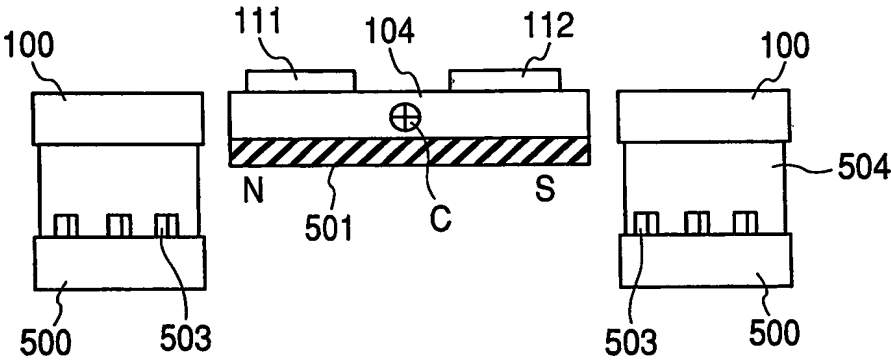


FIG. 7

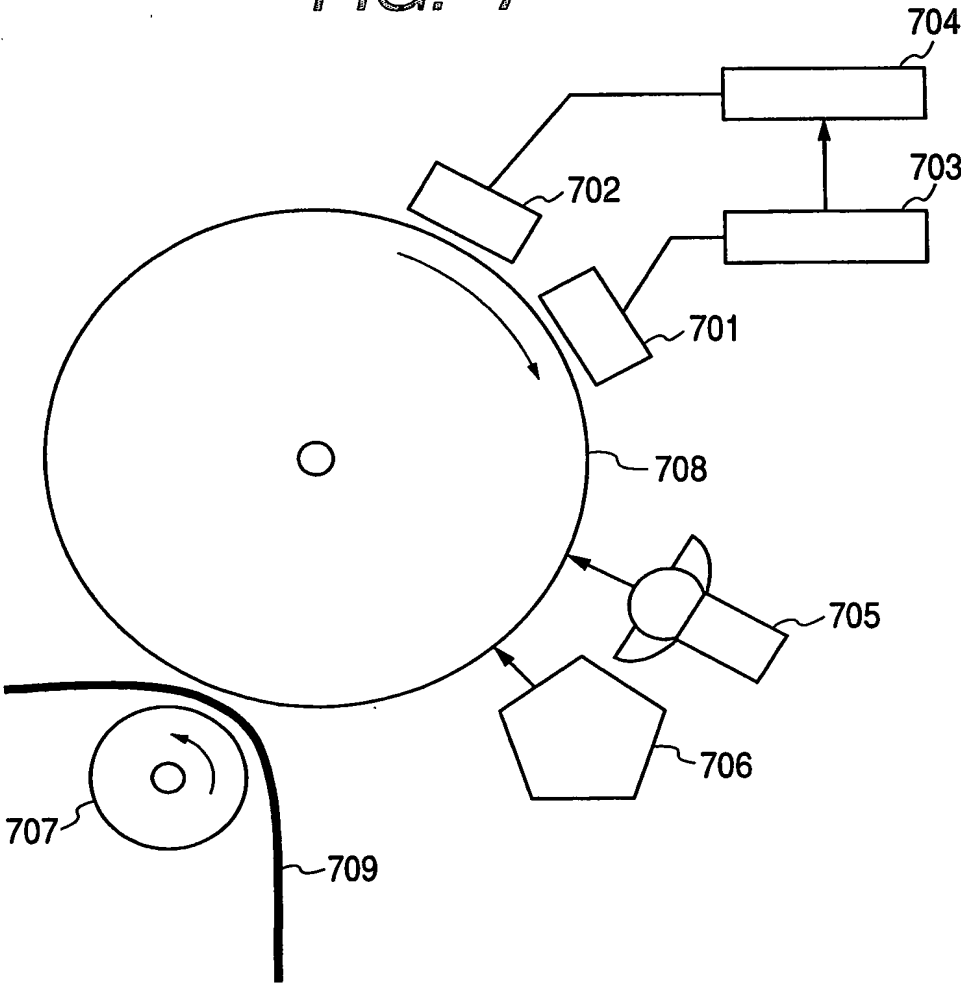

5/5

FIG. 8

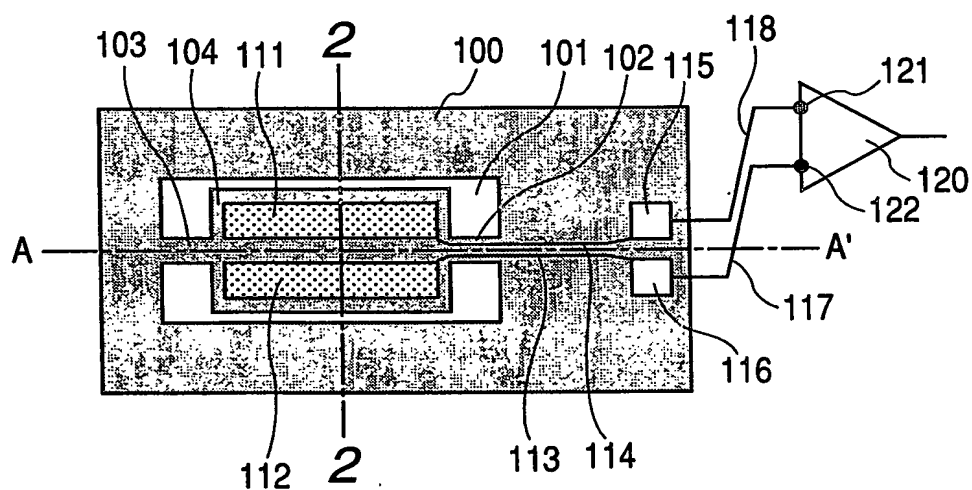

INTERNATIONAL SEARCH REPORT

International Application No
JP2004/004191

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 G01R29/24

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 G01R

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 205 267 A (WILLIAMS BRUCE T) 27 May 1980 (1980-05-27) figures 10-12 column 1, line 8 - line 19 column 6, line 11 - line 15 column 12, line 16 - column 13, line 14	6
Y		1-5
Y	US 5 212 451 A (WERNER JR ALAN J) 18 May 1993 (1993-05-18) cited in the application figures 2A, 3B column 1, line 7 - line 29 column 3, line 36 - line 40 column 4, line 42 - line 63 column 6, line 47 - line 49	1-5
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- * & * document member of the same patent family

Date of the actual completion of the international search

2 July 2004

Date of mailing of the international search report

08/07/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Höller, H

INTERNATIONAL SEARCH REPORT

International Application No

JP/JP2004/004191

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 34 10 527 A (LEYBOLD HERAEUS GMBH & CO KG) 4 October 1984 (1984-10-04) abstract figures 1-4 page 6, paragraph 2 - page 7, paragraph 2 -----	1-4, 6
A	US 2003/042907 A1 (UEHARA TOSHIO ET AL) 6 March 2003 (2003-03-06) figures 5-9 paragraph '0001! - paragraph '0009! paragraph '0022! paragraph '0036! paragraph '0050! -----	1, 4-6
A	EP 1 234 799 A (CANON KK) 28 August 2002 (2002-08-28) abstract figures 1-3, 5, 10, 11A, 12, 17A, 18, 19A, 24A, 26, 27A, 30A -----	1, 2
A	US 4 835 461 A (SNELLING CHRISTOPHER) 30 May 1989 (1989-05-30) figures 3, 4 column 1, line 5 - line 13 column 2, line 43 - line 66 column 4, line 64 - column 5, line 49 -----	6

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/JP2004/004191

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4205267	A	27-05-1980	NONE	
US 5212451	A	18-05-1993	DE 69325835 D1 DE 69325835 T2 EP 0560513 A2 JP 6003396 A	09-09-1999 17-02-2000 15-09-1993 11-01-1994
DE 3410527	A	04-10-1984	DE 3410527 A1	04-10-1984
US 2003042907	A1	06-03-2003	EP 1430312 A2 WO 03019204 A2	23-06-2004 06-03-2003
EP 1234799	A	28-08-2002	JP 2002321197 A JP 2002321196 A JP 2002321198 A EP 1234799 A2 JP 2002323669 A US 2002114053 A1	05-11-2002 05-11-2002 05-11-2002 28-08-2002 08-11-2002 22-08-2002
US 4835461	A	30-05-1989	DE 3509710 A1 GB 2157838 A ,B JP 1858621 C JP 5060060 B JP 60231175 A	31-10-1985 30-10-1985 27-07-1994 01-09-1993 16-11-1985